


V26A with inline motor mounting

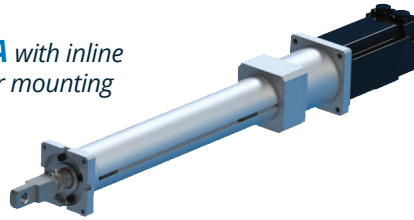

Ball Screw Models


Actuator Model	V26A		V26A		V26A		
Lead (in)	0.2		0.5		1		
Load (lbf)	1400		960		620		
Torque (lbf-in)	59.5		94.9		119.6		
Torque (Nm)	6.7		10.7		13.5		
Speed, Max (RPM)	3000		3000		3000		
Compatible Motors							
230V	Low Inertia, w/o Brake	H-4050-P-H00AA	M444-HNNO-1G0N	H-4075-R-H00AA	M462-GNSO-1G0N	H-6100-Q-H00AA	M462-GNSO-1G0N
	Low Inertia, w/ Brake	H-4050-P-H04AA	M444-HNNB-1G0N	H-4075-R-H04AA	M462-GNSB-1G0N	H-6100-Q-H04AA	M462-GNSB-1G0N
	Medium Inertia, w/o Brake	F-4050-Q-H00AA		F-4075-R-H00AA		F-6100-R-H00AA	
	Medium Inertia, w/ Brake	F-4050-Q-H04AA		F-4075-R-H04AA		F-6100-R-H04AA	
460V	Low Inertia, w/o Brake	1326AS-B440G-21	M444-HNNO-3G0N	1326AS-B460F-21 1326AS-B630F-21	M462-GNSO-3G0N	1326AS-B630F-21	M462-GNSO-3G0N
	Low Inertia, w/ Brake	1326AS-B440G-21-K4	M444-HNNB-3G0N	1326AS-B460F-21-K4 1326AS-B630F-21-K6	M462-GNSB-3G0N	1326AS-B630F-21-K6	M462-GNSB-3G0N
	Medium Inertia, w/o Brake	1326AB-B430E-21		1326AB-B515E-21		1326AB-B520E-21	
	Medium Inertia, w/ Brake	1326AB-B430E-21-K4		1326AB-B515E-21-K5		1326AB-B520E-21-K5	

Roller Screw Models

Actuator Model	V26A		V26A		V26A		
Lead (in)	0.197		0.394		0.2		
Load (lbf)	958		863		1400		
Torque (lbf-in)	43.7		70.1		106.9		
Torque (Nm)	4.9		7.9		12.1		
Speed, Max (RPM)	3000		3000		3000		
Compatible Motors							
230V	Low Inertia, w/o Brake	H-4050-P-H00AA	M444-HNNO-1G0N	H-4075-R-H00AA	M444-HNNO-1G0N	H-6100-Q-H00AA	M462-GNSO-1G0N
	Low Inertia, w/ Brake	H-4050-P-H04AA	M444-HNNB-1G0N	H-4075-R-H04AA	M444-HNNB-1G0N	H-6100-Q-H04AA	M462-GNSB-1G0N
	Medium Inertia, w/o Brake	F-4050-Q-H00AA		F-4075-R-H00AA		F-6100-R-H00AA	
	Medium Inertia, w/ Brake	F-4050-Q-H04AA		F-4075-R-H04AA		F-6100-R-H04AA	
460V	Low Inertia, w/o Brake	1326AS-B440G-21	M444-HHNO-3G0N	1326AS-B460F-21 1326AS-B630F-21	M444-HHNO-3G0N M462-GNSO-3G0N	1326AS-B630F-21	M462-GNSO-3G0N
	Low Inertia, w/ Brake	1326AS-B440G-21-K4	M444-HNNB-3G0N	1326AS-B460F-21-K4 1326AS-B630F-21-K6	M444-HNNB-3G0N M462-GNSB-3G0N	1326AS-B630F-21-K6	M462-GNSB-3G0N
	Medium Inertia, w/o Brake	1326AB-B430E-21		1326AB-B515E-21		1326AB-B520E-21	
	Medium Inertia, w/ Brake	1326AB-B430E-21-K4		1326AB-B515E-21-K5		1326AB-B520E-21-K5	

Acme Screw Models

V32A with inline motor mounting

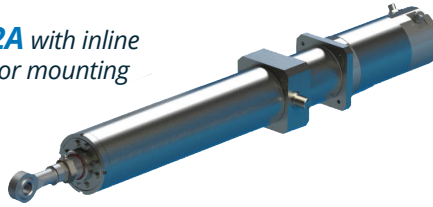

Ball Screw Models


Actuator Model	V32A		V32A		V32A		
Lead (in)	0.2		0.5		0.197		
Load (lbf)	1900		2890		2086		
Torque (lbf-in)	77.2		265.5		84.3		
Torque (Nm)	8.7		30.0		9.5		
Speed, Max (RPM)	3000		3000		3000		
Compatible Motors							
230V	Low Inertia, w/o Brake	H-4075-R-H00AA	M444-HNNO-1G0N	H-6300-Q-H00AA	M476-GNSO-1G0N	H-4075-R-H00AA	M462-GNSO-1G0N
	Low Inertia, w/ Brake	H-4075-R-H04AA	M444-HNNB-1G0N	H-6300-Q-H04AA	M476-GNSB-1G0N	H-4075-R-H04AA	M462-GNSB-1G0N
	Medium Inertia, w/o Brake	F-4075-R-H00AA		F-6300-R-H00AA		F-4075-R-H00AA	
	Medium Inertia, w/ Brake	F-4075-R-H04AA		F-6300-R-H04AA		F-4075-R-H04AA	
460V	Low Inertia, w/o Brake	1326AS-B460F-21	M444-HNNO-3G0N	1326AS-B690E-21	M476-GNSO-3G0N	1326AS-B460F-21	M462-GNSO-3G0N
		1326AS-B630F-21	M462-GNSO-3G0N			1326AS-B630F-21	
	Low Inertia, w/ Brake	1326AS-B460F-21-K4	M444-HNNB-3G0N	1326AS-B690E-21-K6	M476-GNSB-3G0N	1326AS-B460F-21-K4	M462-GNSB-3G0N
		1326AS-B630F-21-K6	M462-GNSB-3G0N			1326AS-B630F-21-K6	
	Medium Inertia, w/o Brake	326AB-B515E-21		1326AB-B720E-21		1326AB-B515E-21	
	Medium Inertia, w/ Brake	1326AB-B515E-21-K5		1326AB-B720E-21-K7		1326AB-B515E-21-K5	

Roller Screw Models

Actuator Model	V32A		V32A		V32A		
Lead (in)	0.197		0.394		0.2		
Load (lbf)	2086		1968		2800		
Torque (lbf-in)	84.3		147		232.8		
Torque (Nm)	9.5		16.6		26.3		
Speed, Max (RPM)	3000		3000		3000		
Compatible Motors							
230V	Low Inertia, w/o Brake	H-4075-R-H00AA	M462-GNSO-1G0N	H-6200-Q-H00AA	M463-KNSO-1G0N	H-6300-Q-H00AA	M476-GNSO-1G0N
	Low Inertia, w/ Brake	H-4075-R-H04AA	M462-GNSB-1G0N	H-6200-Q-H04AA	M463-KNSC-1G0N	H-6300-Q-H04AA	M476-GNSB-1G0N
	Medium Inertia, w/o Brake	F-4075-R-H00AA		F-6200-R-H00AA		F-6300-R-H00AA	
	Medium Inertia, w/ Brake	F-4075-R-H04AA		F-6200-R-H04AA		F-6300-R-H04AA	
460V	Low Inertia, w/o Brake	1326AS-B460F-21	M462-GNSO-3G0N	1326AS-B660E-21	M463-KNSO-3G0N	1326AS-B690E-21	M476-GNSO-3G0N
		1326AS-B630F-21				1326AS-B630F-21	
	Low Inertia, w/ Brake	1326AS-B460F-21-K4	M462-GNSB-3G0N	1326AS-B660E-21-K6	M463-KNSC-3G0N	1326AS-B460F-21-K4	M476-GNSB-3G0N
		1326AS-B630F-21-K6				1326AS-B690E-21-K6	
	Medium Inertia, w/o Brake	1326AB-B515E-21		1326AB-B530E-21		1326AB-B720E-21	
	Medium Inertia, w/ Brake	1326AB-B515E-21-K5		1326AB-B530E-21-K7		1326AB-B720E-21-K7	

Acme Screw Models

V43A with parallel motor mounting



Ball Screw Models


Actuator Model	V43A		V43A		V43A	
Lead (in)	0.25		0.5		1	
Load (lbf)	3890		3890		2300	
Torque (lbf-in)	182		354		416.7	
Torque (Nm)	20.6		40.0		47.1	
Speed, Max (RPM)	3000		3000		3000	
Compatible Motors						
230V	Low Inertia, w/o Brake	H-6200-Q-H00AA	M464-GNS0-1G0N		M477-GNS0-1G0N	
	Low Inertia, w/ Brake	H-6200-Q-H04AA	M464-GNSC-1G0N		M477-GNSB-1G0N	
	Medium Inertia, w/o Brake	F-6200-R-H00AA				
	Medium Inertia, w/ Brake	F-6200-R-H04AA				
460V	Low Inertia, w/o Brake	1326AS-B660E-21	M464-GNS0-3G0N	1326AB-B730E-21	M477-GNS0-3G0N	1326AB-B740E-21 SJCP-B100L-E-M72AA SJCP-B100L-E-M74AA
	Low Inertia, w/ Brake	1326AS-B660E-21-K6	M464-GNSC-3G0N	1326AB-B730E-21-K7	M477-GNSB-3G0N	1326AB-B740E-21-K7 SQCP-B132X-E-M72AA SQCP-B132X-E-M74AA
	Medium Inertia, w/o Brake	1326AB-B720E-21				
	Medium Inertia, w/ Brake	1326AB-B720E-21-K7				

Roller Screw Models

Actuator Model	V43A		V43A		V43A	
Lead (in)	0.197		0.394		0.25	
Load (lbf)	3698		3651		3800	
Torque (lbf-in)	143.2		267		407.9	
Torque (Nm)	16.2		30.2		46.1	
Speed, Max (RPM)	3000		3000		3000	
Compatible Motors						
230V	Low Inertia, w/o Brake	H-6200-Q-H00AA	M463-KNS0-1G0N	H-6300-Q-H00AA	M476-GNS0-1G0N	
	Low Inertia, w/ Brake	H-6200-Q-H04AA	M463-KNSC-1G0N	H-6300-Q-H04AA	M476-GNSB-1G0N	
	Medium Inertia, w/o Brake	F-6200-R-H00AA		F-6300-R-H00AA		
	Medium Inertia, w/ Brake	F-6200-R-H04AA		F-6300-R-H04AA		
460V	Low Inertia, w/o Brake	1326AS-B660E-21	M463-KNS0-3G0N	1326AS-B690E-21	M476-GNS0-3G0N	SJCP-B100L-E-M72AA
	Low Inertia, w/ Brake	1326AS-B660E-21-K6	M463-KNSC-3G0N	1326AS-B690E-21-K6	M476-GNSB-3G0N	SJCP-B100L-E-M74AA
	Medium Inertia, w/o Brake	1326AB-B530E-21		1326AB-B720E-21		1326AB-B740E-21 SQCP-B132X-E-M72AA
	Medium Inertia, w/ Brake	1326AB-B530E-21-K7		1326AB-B720E-21-K7		1326AB-B740E-21-K7 SQCP-B132X-E-M74AA

Acme Screw Models

V55A with parallel motor mounting



Ball Screw Models

Actuator Model	V55A		V55A		V55A	
Lead (in)	0.25		0.5		1	
Load (lbf)	6400		11865		8000	
Torque (lbf-in)	292.9		1059.1		1424.7	
Torque (Nm)	33.1		119.7		161.0	
Speed, Max (RPM)	3000		3000		3000	
Compatible Motors						
230V	Low Inertia, w/o Brake	H-6300-Q-H00AA	M476-GNS0-1G0N			
	Low Inertia, w/ Brake	H-6300-Q-H04AA	M476-GNSB-1G0N			
460V	Low Inertia, w/o Brake	1326AS-B690E-21	M476-GNS0-3G0N	SJCP-B132X-E-M72AA	SJCP-B132X-E-M72AA	SJCP-B160P-E-M72AA
	Low Inertia, w/ Brake	1326AS-B690E-21-K6		SJCP-B132X-E-M74AA	SJCP-B132X-E-M74AA	SJCP-B160P-E-M74AA
	Medium Inertia, w/o Brake	1326AB-B720E-21		SQCP-B132X-E-M72AA	SQCP-B132X-E-M72AA	SQCP-B160M-E-M72AA
	Medium Inertia, w/ Brake	1326AB-B720E-21-K7		SQCP-B132X-E-M74AA	SQCP-B132X-E-M74AA	SQCP-B160M-E-M74AA

Roller Screw Models

Actuator Model	V55A		V55A		V55A	
Lead (in)	0.197		0.394		0.25	
Load (lbf)	9672		10099		9375	
Torque (lbf-in)	366.5		729.1		1253.4	
Torque (Nm)	41.4		82.4		141.6	
Speed, Max (RPM)	3000		3000		3000	
Compatible Motors						
230V	Low Inertia, w/o Brake		M477-GNS0-1G0N			
	Low Inertia, w/ Brake		M477-GNSB-1G0N			
460V	Low Inertia, w/o Brake	1326AB-B730E-21	M477-GNS0-3G0N	SJCP-B132M-E-M72AA		SJCP-B132X-E-M72AA
	Low Inertia, w/ Brake	1326AB-B730E-21-K7	M477-GNSB-3G0N	SJCP-B132M-E-M74AA		SJCP-B132X-E-M72AA
	Medium Inertia, w/o Brake			SQCP-B132M-E-M72AA		SQCP-B132X-E-M72AA
	Medium Inertia, w/ Brake			SQCP-B132M-E-M74AA		SQCP-B132X-E-M74AA

Acme Screw Models